





SMD POWER INDUCTORS SMD 功率電感 BCRHB124B TYPE

AXIS POWER 經軸電子



- Features

1. Various high power inductors are superior to be high saturation for surface mounting.

● 特點

1. 廣闊的感值範圍是高飽和表面貼裝的最佳選擇。



- Applications

1. Power supply for VTR、OA equipment.
 2. LCD television set、notebook PC.
 3. Portable communication, equipments.
 4. DC/DC converters, etc.

● 應用

1. 錄影機、辦公自動設備.
 2. 液晶電視機、筆記型電腦.
 3. 通訊設備.
 4. 直流對直流電源供應器等.

ELECTRICAL CHARACTERISTICS FOR BCRHB124B SERIES

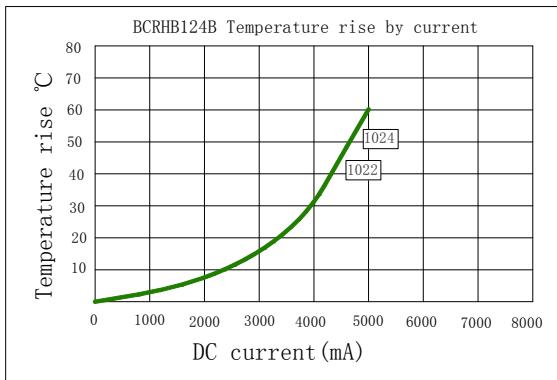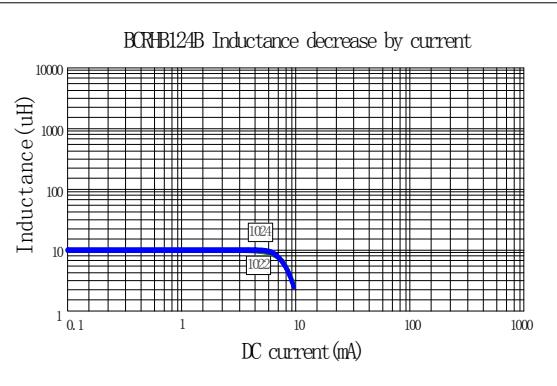

- (1). Inductance tested at 0.25V. Tolerance of inductance: $\pm 20\%$ (M)

- (2). PCR test temp. limits 25°C.

- (3). This indicates the value of current when the inductance is 25% lower than its initial value at D.C. superposition or D.C. current.

- (4). To load current onto the components under normal ambience, which cause the temp. change as $\Delta t=40^{\circ}\text{C}$ or more lower current.

- (5). Please refer saturated current or the minimum temperature current as standard .

- (1).電感測試條件為 $0.25V$ 。電感的公差為 $\pm 20\%$ (M)

- (2).電阻(測試)溫度爲 25°C 。

- (3).是在疊加直流或者直流負載的狀況下，電感比其初始值下降 25% 時的電流。

- (4). 在空氣中，一元器件通以電流，使元件表面溫度變化為 $\Delta t=40^{\circ}\text{C}$ 或低一些的電流值。

- (5).使用時，請參照飽和電流、溫升電流最小的電流為額定電流。