
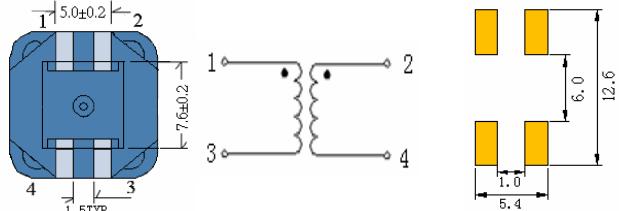


SMD POWER INDUCTORS SMD 功率電感
BCRHB127B TYPE

AXIS POWER 經軸電子

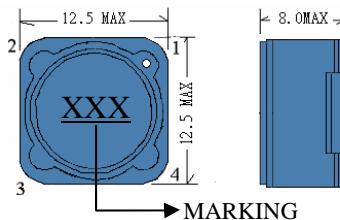

• Features

1. Various high power inductors are superior to be high saturation for surface mounting.

• 特點

1. 廣闊的感值範圍，是高飽和表面貼裝的最佳選擇。

• Applications



1. Power supply for VTR、OA equipment.
2. LCD television set、notebook PC.
3. Portable communication, equipments.
4. DC/DC converters, etc.

• 應用

1. 錄影機、辦公自動設備。
2. 液晶電視機、筆記型電腦。
3. 通訊設備。
4. 直流對直流電源供應器等。

**ELECTRICAL CHARACTERISTICS FOR 電氣特性
BCRHB127B SERIES**

Part Number 料號	Inductance 電感 (uH) (1)	Test Frequency 測試頻率	DC Resistance 電阻 (Ω MAX) (2)	Saturation Current 飽和電流 (A) (3)	Temperature Current 溫升電流 (A) (4)	TURN RATIO 圈數比 (L1:L2)	
BCRHB127B-7622	L1=7.6	1KHZ	31m	7.00	5.00	1:2.2	
	L2=38	1KHZ	180m	3.20	2.40		
BCRHB127B-1022	L1=10	1KHZ	38m	4.50	4.50	1:2.2	
	L2=45	1KHZ	200m	2.00	2.20		
BCRHB127B-1042	L1=10	1KHZ	33m	4.50	4.70	1:4.2	
	L2=160	1KHZ	650m	1.00	1.00		

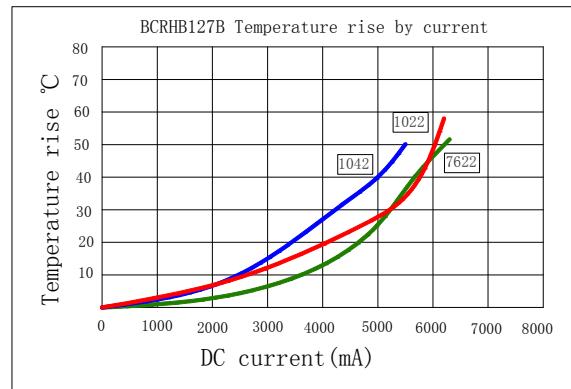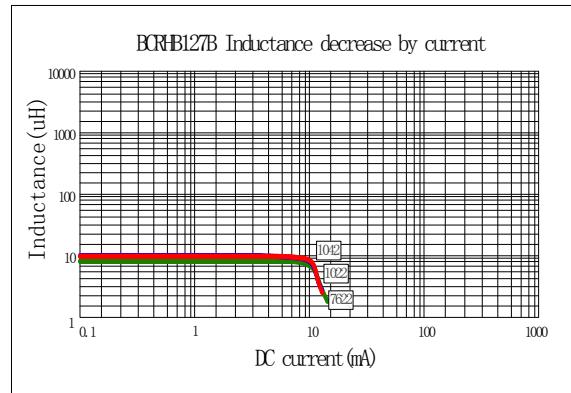

(1). Inductance tested at 0.25V. Tolerance of inductance: $\pm 20\%$ (M)

(1).電感測試條件為 0.25V。電感的公差為 $\pm 20\%$ (M)

(2). DCR test temp. limits 25°C.

(2).電阻（測試）溫度為 25°C。

(3). This indicates the value of current when the inductance is 25% lower than its initial value at D.C. superposition or D.C. current.

(3).是在疊加直流或者直流負載的狀況下，電感比其初始值下降 25%時的電流。

(4). To load current onto the components under normal ambience, which cause the temp. change as $\Delta t=40^\circ\text{C}$ or more lower current.

(4).在空氣中，一元器件通以電流，使元件表面溫度變化為 $\Delta t=40^\circ\text{C}$ 或低一些的電流值。

(5). Please refer saturated current or the minimum temperature current as standard .

(5).使用時，請參照飽和電流、溫升電流最小的電流為額定電流。