

- Features

1. Various high power inductors are superior to be high saturation for surface mounting.

### ● 特點

- 附註  
1. 廣闊的感值範圍,是高飽和表面貼裝的最佳選擇.



### • Applications

1. Power supply for VTR、OA equipment.
  2. LCD television set、notebook PC.
  3. Portable communication, equipments.
  4. DC/DC converters, etc.

· 應用

- 1. 錄影機、辦公自動設備.
  - 2. 液晶電視機、筆記型電腦.
  - 3. 通訊設備.
  - 4. 直流對直流電源供應器等.

## **ELECTRICAL CHARACTERISTICS FOR BCEP125H SERIES**

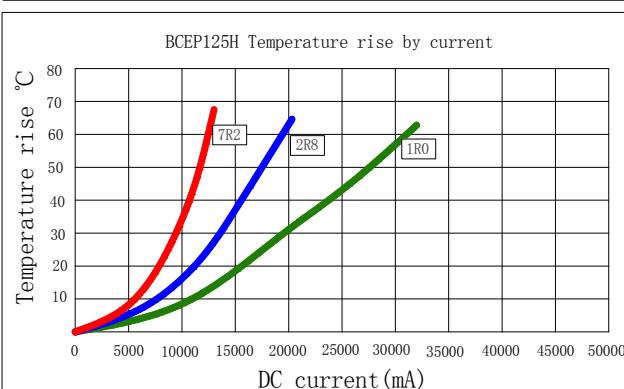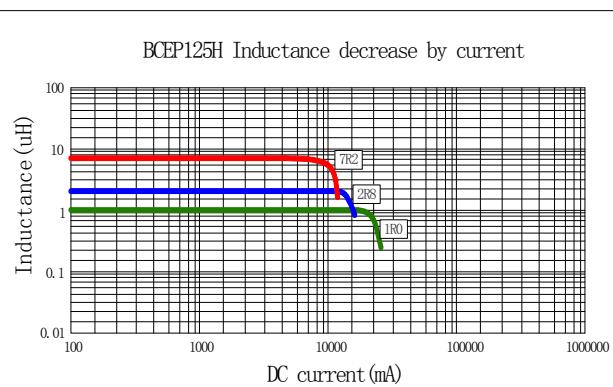

- (1). Inductance tested at 0.25V. Tolerance of inductance: $\pm 20\%$  (M).
  - (2). DCR test temp. limits  $25^{\circ}\text{C}$ .
  - (3). This indicates the value of current when the inductance is 25% lower than its initial value at D.C. superposition or D.C. current.
  - (4). To load current onto the components under normal ambience, which cause the temp. change as  $\Delta t=40^{\circ}\text{C}$  or more lower current.
  - (5). Please refer saturated current or the minimum temperature current as standard.

- (1).電感測試條件為  $0.25V$ 。電感的公差為: $\pm 20\%$ (M).
  - (2).電阻(測試)溫度為  $25^\circ C$ 。
  - (3).是在疊加直流或者直流負載的狀況下，電感比其初始值下降  $25\%$ 時的電流。
  - (4).在空氣中，一元器件通以電流，使元件表面溫度變化為  $\Delta t=40^\circ C$ 或低一些的電流值。
  - (5).使用時，請參照飽和電流、溫升電流最小的電流為額定電流。